
Designation No: 2200542

CONTRACT NO. B-44532

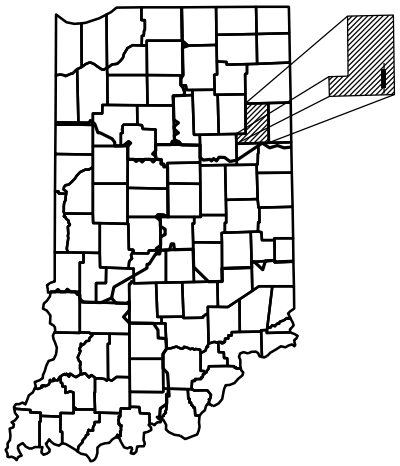

PROJECT LOCATION SHOWN BY

Wells County

DES. NO. 2200542

KIN PROJECT INFORMATION	
DESIGNATION	DESCRIPTION
2200946 (LEAD)	SR-1 / Bridge over Wabash River, 0.05 miles S SR 124
2200957	US-224 / Bridge over Eight Mile Creek, 0.51 miles E SR 301

INDIANA DEPARTMENT OF TRANSPORTATION

BRIDGE PREVENTIVE MAINTENANCE PLANS

Bridge Thin Deck Overlay


SR 1 bridge over Six Mile Creek, 2.19 miles S SR 218

NO RIGHT-OF-WAY REQUIRED

Str. No.	DES. NO.	Bridge File No.	NBI#	Latitude	Longitude
3	2200542	001-90-07052-B	000370	40° 37' 24"	85° 09' 04"

TRAFFIC DATA	
A.A.D.T. (2027)	2,446 V.P.D.
A.A.D.T. (2047) PROJ.	2,629 V.P.D.
D.H.V. (2047)	258 V.P.H.
DIRECTIONAL DISTRIBUTION	50.08 %
TRUCKS	15.13 % A.A.D.T.
	7.63 % D.H.V.

DESIGN DATA	
DESIGN SPEED	55 MPH
PROJECT DESIGN CRITERIA	PREVENTIVE MAINTENANCE
FUNCTIONAL CLASS	OTHER PRINCIPAL ARTERIAL
RURAL/URBAN	RURAL
TERRAIN	LEVEL
ACCESS CONTROL	NONE

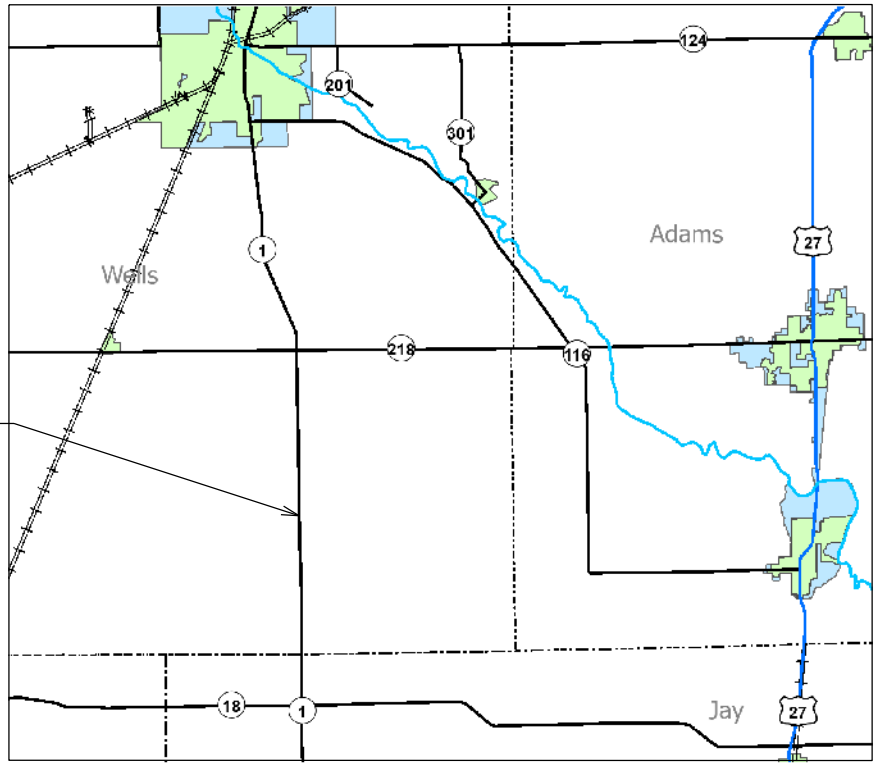

Str. Location:
RP 116+71

Not to Scale

PLANS PREPARED BY: Khaled Buhadila, E.I.

PHONE NUMBER: 260-969-8292

AUSTIN J. EICHMAN
REGISTERED
No. 12000697
STATE OF INDIANA
PROFESSIONAL ENGINEER

DATE: 04/14/2026

CERTIFIED BY: Austin J Eichman

RECOMMENDED FOR LETTING: Stephanie J. Wagner
INDIANA DEPARTMENT OF TRANSPORTATION

09/03/2026
DATE

Indiana Department of Transportation
Standard Specifications dated 2026
to be used with these plans.

PROJECT DESCRIPTION: Bridge Thin Deck Overlay

Contract No: B-44532

INDEX SHEET

TITLE SHEET 1
INDEX SHEET 2
GENERAL NOTES & UTILITY INFORMATION 3
BRIDGE LOCATION INFORMATION TABLE..... 4
DETOUR ROUTE 5
CONSTRUCTION SIGN DETAILS 6
BRIDGE CONSTRUCTION DETAILS 7

QUANTITY SUMMARY TABLES

BRIDGE QUANTITIES 8
DETOUR ROUTE 9
PAVEMENT MARKINGS 10

REVISIONS		
SHEET NO.	DATE	REVISED

811 Know what's below. Call before you dig.

INDIANA UNDERGROUND
1-800-382-5544 OR CALL 811
24 HOURS A DAY 7 DAYS A WEEK

GENERAL NOTES

- Partial & Full Depth Patching job will be anticipated for the Bridge Deck & Approaches Slabs.
- The existing thin-deck overlay will be removed by milling and a new thin deckoverlay will be placed at the normal depth 3/8" of Warranted Polymer Materials.
- Bridge approaches will be overlaid with Non-Warranted Polymer material.
- Surface seal barrier walls around the drip bead for the outside spans of the bridge only. The surface seal still needs to be placed on the middle span but just over the top, not to the drip bead.
- Type 1-A exist joint work will be anticipated (Joint in PCCP,Filled)
- No Terminal joints are anticipated for this bridge.

UTILITIES

At this location:


- Utility shall not conflict with the proposed work.
- Right of way is not required.
- No RR coordination will be anticipated.

811 Know what's below. Call before you dig.

INDIANA UNDERGROUND
1-800-382-5544 OR CALL 811
24 HOURS A DAY 7 DAYS A WEEK

BRIDGE LOCATION INFORMATION TABLE

Des. No.	Bridge File No. (Structure Type)	NBI No.	Route and Crossing Feature	Location	Ref. Post	County	Bridge Length Out to Out (ft)	Bridge Width Out to Out (ft)	Roadway Width Curb-to-Curb (ft)	No. of Spans	Work Type	Annual Average Daily Traffic (AADT 2027)
2200542	001-90-00230-B	000370	SR 1 Over Six Mile Creek	2.19 mile S SR 218	116+71	Wells	72'-7 1/4"	47'-1 1/2"	44	3	Bridge Thin Deck Overlay	2,446

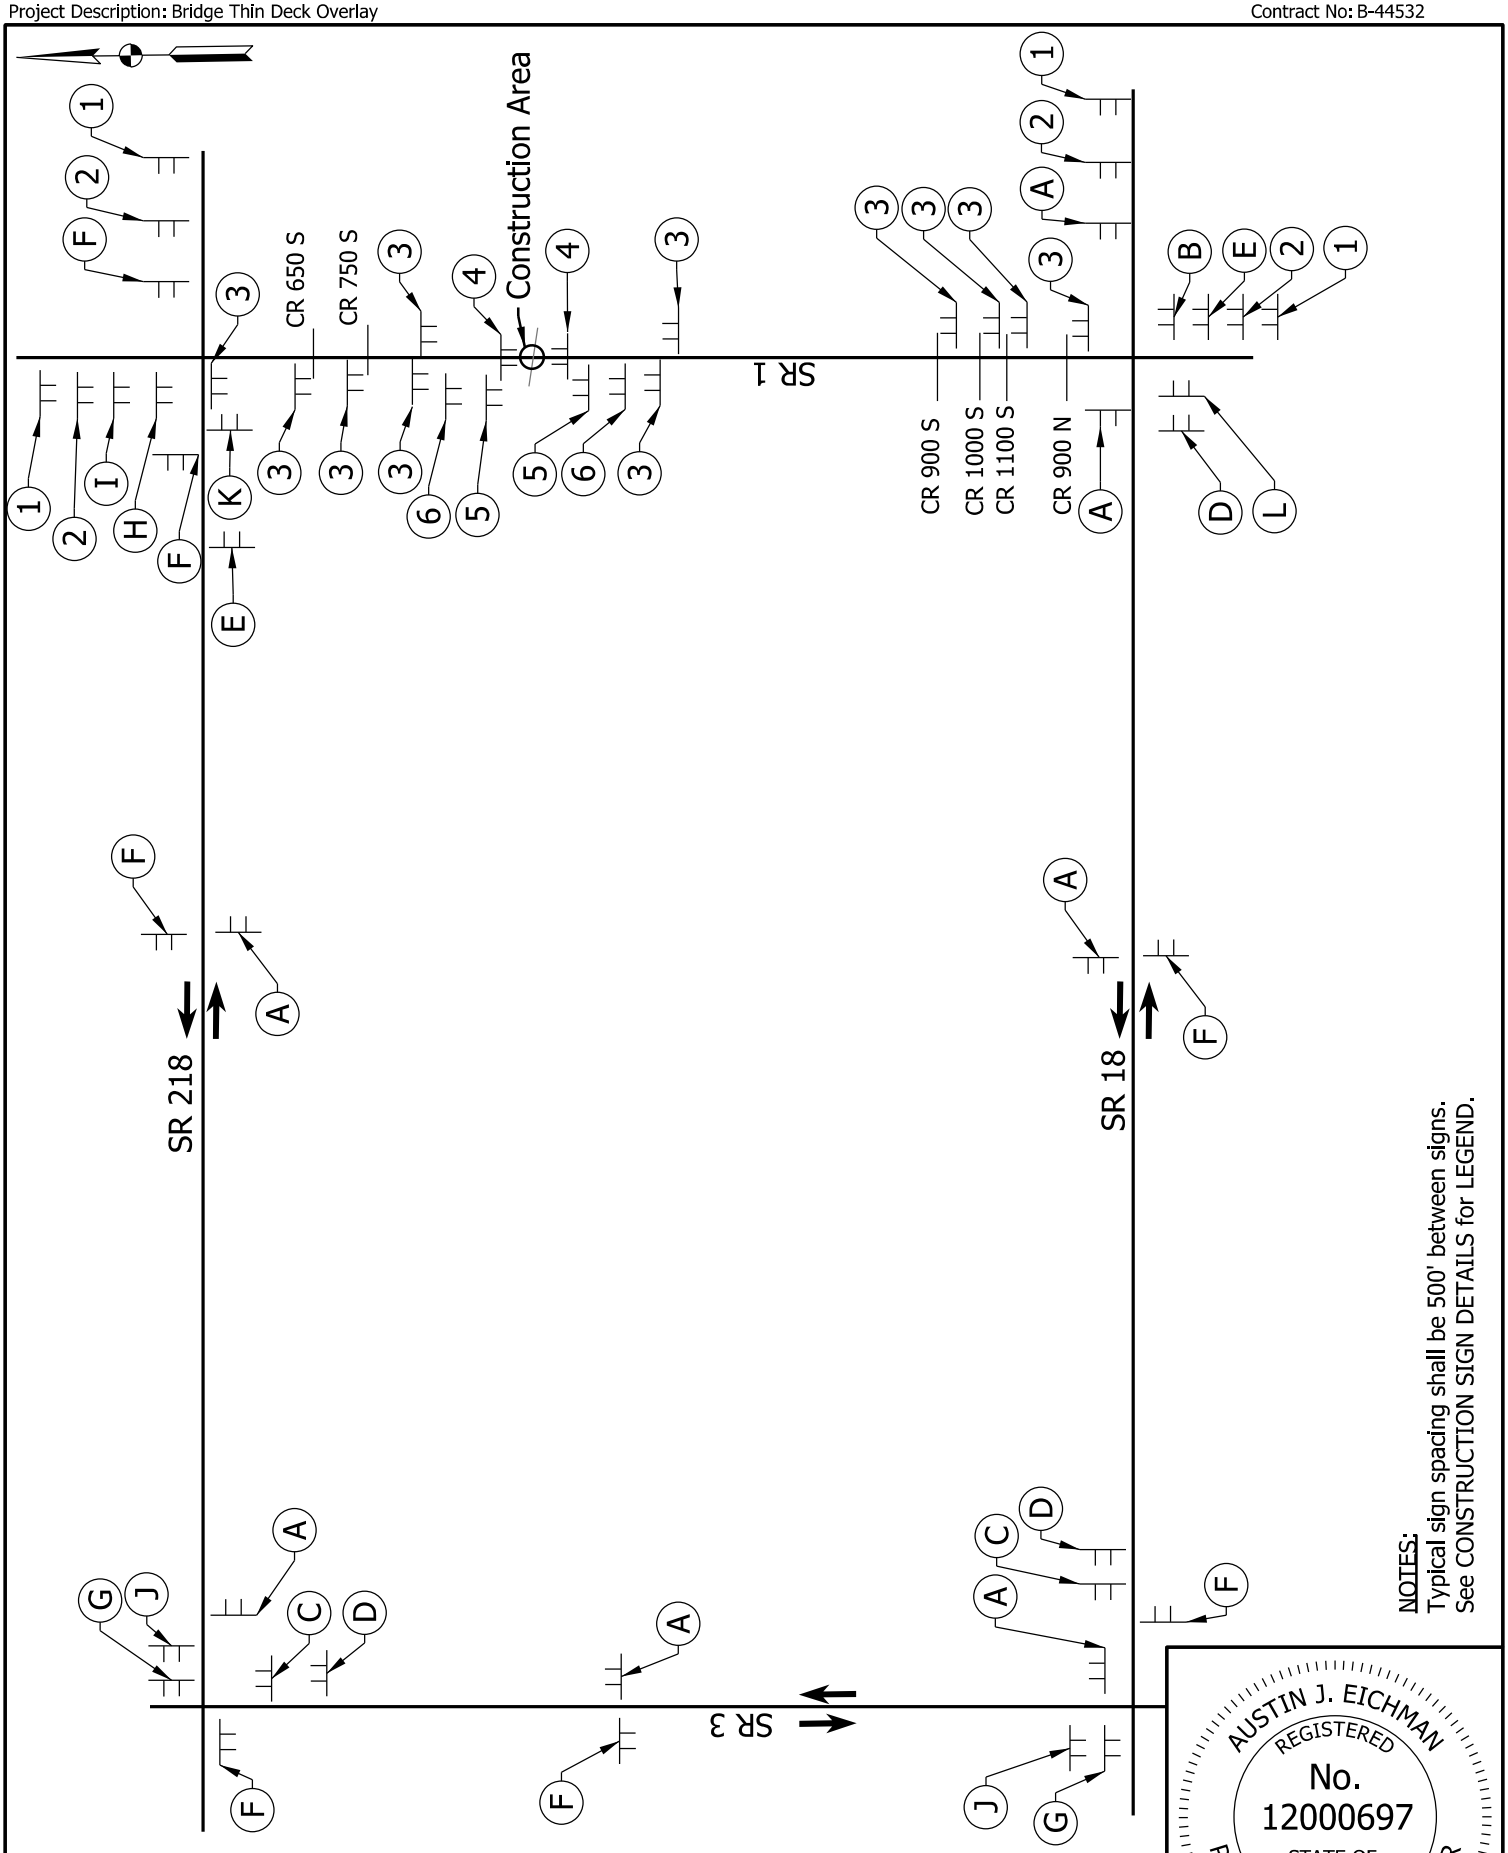

NOTES:
Typical sign spacing shall be 500' between signs.
See CONSTRUCTION SIGN DETAILS for LEGEND.

AUSTIN J. EICHMAN
REGISTERED
No.
12000697
STATE OF
INDIANA
PROFESSIONAL ENGINEER

DETOUR ROUTE

Recommended for Approval:
AUSTIN EICHMAN
Date:
04/14/2026

LEGEND:

1 

XW20-3
M1-5

2 

XW20-2
M1-5

3 BARRICADE TYPE III-B with


R11-3a

4 BARRICADE TYPE III-B with



R11-2

5 


XW20-3

6 


XW20-3

A



XM4-8
M3-1:S
M1-5
M6-3

B



XM4-8
M3-1:S
M1-5
M6-1L

C



M3-1:S
M1-5
M6-1R

D



XM4-8
M3-1:S
M1-5
M5-1R

E



XM4-8
M3-1:S
M1-5
M5-1L

F



XM4-8
M3-3:S
M1-5
M6-3

G



XM4-8
M3-3:S
M1-5
M6-1L

H



XM4-8
M3-3:S
M1-5
M6-1R

I



XM4-8
M3-3:S
M1-5
M5-1R

J


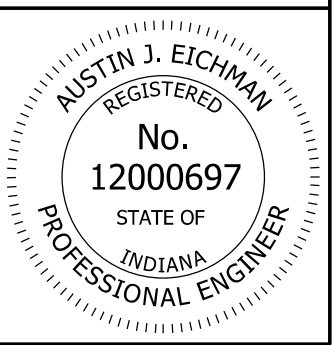
XM4-8
M3-3:S
M1-5
M5-1L

K


XM4-8A
M1-5
M6-1L


L


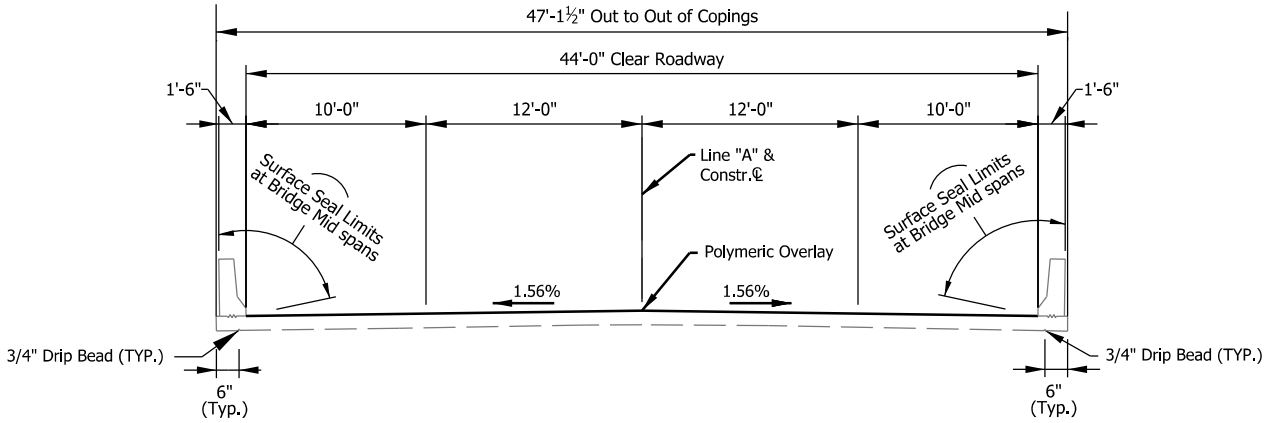
XM4-8A
M1-5
M6-1R



CONSTRUCTION SIGN DETAILS

Recommended for Approval:
AUSTIN EICHMAN
Date:
04/14/2026

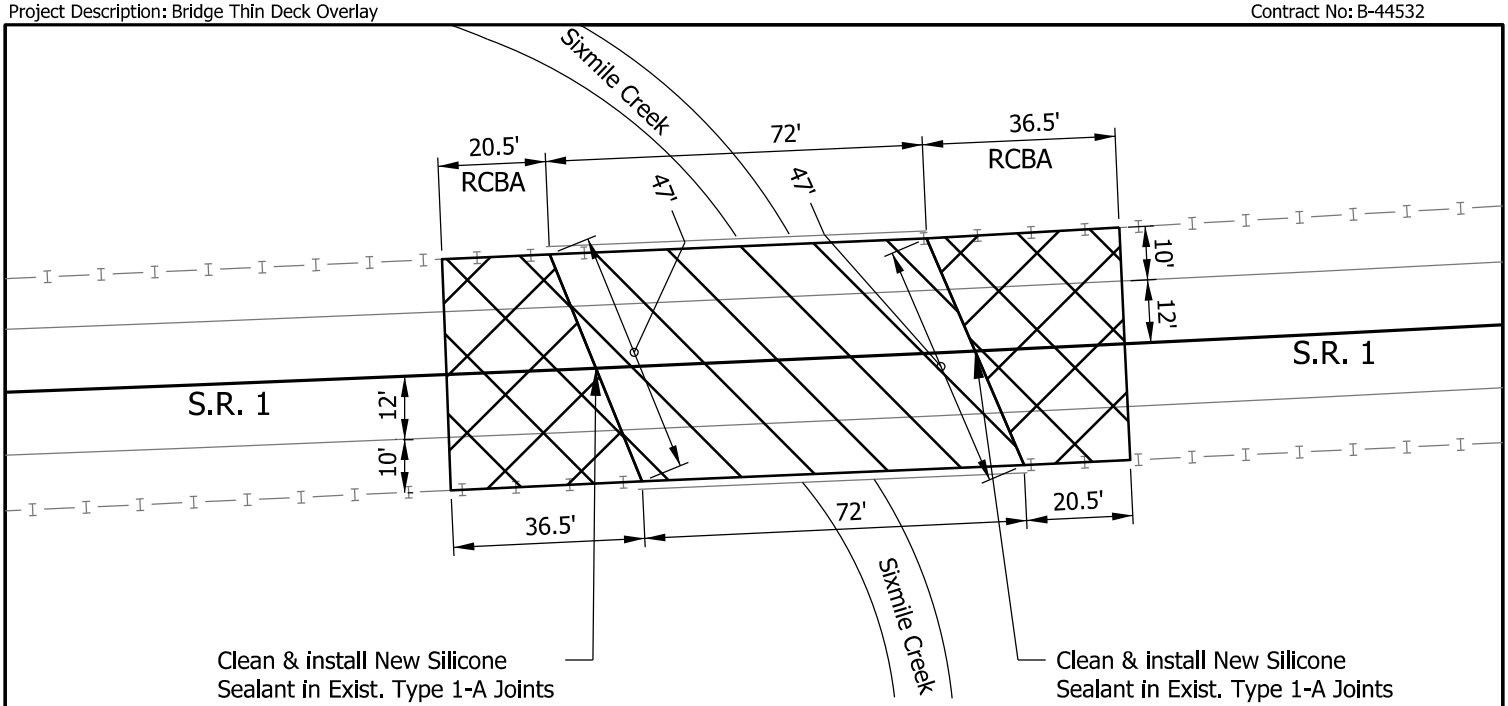



TYPICAL SECTION
Not to Scale

LEGEND:

Warranted Polymer Overlay, Bridge Deck

Polymer Overlay, Other Concrete Surface

RCBA Reinforced Concrete Bridge Approach

AUSTIN J. EICHMAN
REGISTERED
No. 12000697
STATE OF INDIANA
PROFESSIONAL ENGINEER

CONSTRUCTION DETAILS

Recommended for Approval:
AUSTIN EICHMAN
Date:
04/14/2026

BRIDGE QUANTITIES SUMMARY TABLE

Des. No.	Bridge File No.	Warranted Polymer Overlay, Bridge Deck	Polymer Overlay, Bridge Deck Approaches	Bridge Deck, Remove Existing Polymer Overlay System	Bridge Deck Patching, Partial Depth	Bridge Deck Patching, Full Depth	Surface Seal	Joints in PCCP, Filled
		(sys)	(sys)	(sys)	(sft)	(sft)	(sft)	lft
2200542	001-90-07052-B	352	279	631	158	32	1288	94
	Totals	**352**	**279**	**631**	**158**	**32**	**1288**	**94**

Note:

Bridge surface seal, estimated at 1,288 sqf for information only, shall be paid as one Lump Sum item.

DETOUR ROUTE SUMMARY TABLE

	1	2	3&4	5	6	-	Π
Item	Road Closed Ahead & Route Marker (Type A & B Constr. Signs)	Detour Ahead & Route Marker (Type A & B Constr. Signs)	Road Closure Sign Assembly	Road Closed 500 ft (Type A Constr. Sign)	Road Closed 1000 ft (Type A Constr. Sign)	Detour Route Marker Assembly	Barricade Type III-B
	(ea)	(ea)	(ea)	(ea)	(ea)	(ea)	(lft)
Detour Construction Signs	4	4	14	2	2	29	196
(Maximum) Totals	**4**	**4**	**14**	**2**	**2**	**29**	**196**

Note:

Typical sign spacing shall be 500 ft between signs.

PAVEMENT MARKINGS SUMMARY TABLE

Des. No.	Bridge File No.	Multi-Component	Line, Paint	Remarks
		Broken, Yellow, 4 in	Solid, White, 4 in	
		(lft)	(lft)	
2200542	013-85-02050-B	50	258	
	Totals	**50**	**258**	

Notes:

1. If temporary markings are needed, only Removable Tape Pavement markings will be allowed on bridge deck and bridge approach wearing surfaces.
2. Permanent markings will only be allowed once the final wearing surface is placed on the deck and approach slabs.
3. No grinding, blasting nor any other harsh removal method shall be allowed on the final wearing surfaces.
4. Any damages sustained by the final wearing surfaces before project acceptance will be removed and replaced at the contractor's expense.