DESIGNATION	BRIDGE FILE NO.
2200671	050-15-002100 CEBL
CONTRACT	
B-44450	

INDIANA DEPARTMENT OF TRANSPORTATION

STRUCTURE INFORMATION				
STRUCTURE	TYPE	SPAN AND SKEW	OVER	STATION
050-15-0021CEBL	Continuous Composite Prestressed Concrete Bulb-T Beam Bridge	5 Spans: 82'-2⅛", 105'-7½", 113'-9", 105'-7½" & 81'-11¾" Skew: 20° Lt.	Tanners Creek and Service Road	389+12.07 Line "A"

TRAFFIC DATA		
A.A.D.T.	(2027)	35,254 V.P.D.
A.A.D.T.	(2047)	35,753 V.P.D.
D.H.V	(2047)	3,080 V.P.H.
DIRECTIONAL DISTRIBUTION		50.36 %
TRUCKS		4.70 % A.A.D.T.
		2.58 % D.H.V.

DESIGN DATA	
DESIGN SPEED	30 M.P.H.
PROJECT DESIGN CRITERIA	3R (NON-FREEWAY)
FUNCTIONAL CLASSIFICATION	PRINCIPAL ARTERIAL
RURAL/URBAN	URBAN(INTERMEDIATE)
TERRAIN	LEVEL
ACCESS CONTROL	NONE

BRIDGE PREVENTIVE MAINTENANCE PLANS


FOR SPANS OVER 20 FEET

ROUTE: US 50 AT: 163+97

DESIGNATION NO. 2200671

NO ADDITIONAL RIGHT-OF-WAY
REQUIRED FOR THIS PROJECT.

Bridge Thin Deck Overlay on US 50 over Tanners Creek
Located 0.08 Miles East of SR 48,
in Section 15, T-5-N, R-1-W, Lawrenceburg Township, Dearborn County, Indiana

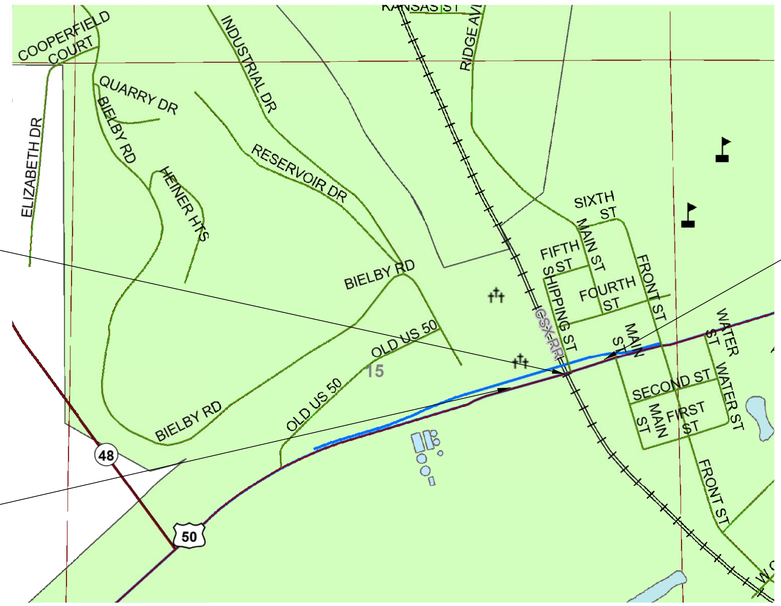


Structure 050-15-00210 CEBL
Over Tanners Creek and Service Rd.
Sta. 389+12.07 "A"

Begin Project
Sta. 386+34.06 "A"

SCALE: 1" = 1000'

End Project
Sta. 391+92.86 "A"

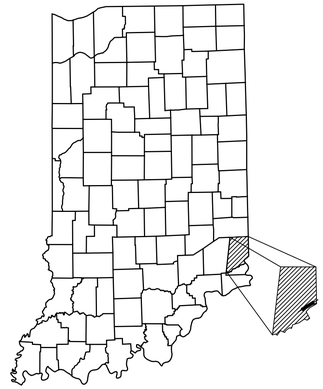

LATITUDE: 39° 05' 43.04" N LONGITUDE: 84° 51' 42.26" W

BRIDGE LENGTH:	0.093	MI.
ROADWAY LENGTH:	0.013	MI.
TOTAL LENGTH:	0.106	MI.
MAX. GRADE:	0.32	%

HUC: 050902030304

INDIANA DEPARTMENT OF TRANSPORTATION
STANDARD SPECIFICATIONS DATED 2026
TO BE USED WITH THESE PLANS

STRAND ASSOCIATES®

MARIAH PAIGE FENIMORE REGISTERED PE12500349 STATE OF INDIANA PROFESSIONAL ENGINEER

PLANS PREPARED BY: STRAND ASSOCIATES, INC. (812) 372-9911
629 WASHINGTON ST., COLUMBUS, IN 47201 PHONE NUMBER

CERTIFIED BY: Mariah Fenimore 6/2/2026 DATE

APPROVED FOR LETTING: Stephanie J. Wagner 09/03/2026
INDIANA DEPARTMENT OF TRANSPORTATION DATE

BRIDGE FILE NO.
050-15-002100 CEBL
DESIGNATION
2200671
SHEETS
1 of 11
CONTRACT
B-44450

S:\COL\4000-4099\4060\737\Drawings\CAD\Plan\Sht_Title.dgn 6/11/2026 11:01:53 AM gregsz

UTILITIES

NO UTILITIES PRESENT

GENERAL NOTES

INDEX

SHEET NO.	DRAWINGS INDEX
1	TITLE
2	INDEX
3-6	MAINTENANCE OF TRAFFIC
7	PAVEMENT MARKINGS DETAIL
8-10	GENERAL PLAN
11	BRIDGE SUMMARY OF QUANTITIES

REVISIONS

SHEET NO.	DATE	REVISED

811

Know what's **below.**
Call before you dig.

INDIANA UNDERGROUND
1-800-382-5544 OR CALL 811
24 HOURS A DAY 7 DAYS A WEEK

PAIGE FENIMORE
REGISTERED
PE12500349
STATE OF
INDIANA
PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL Mariah Fenimore 6/2/2026
DESIGN ENGINEER DATE


DESIGNED: EMS DRAWN: EMS
CHECKED: MPF CHECKED: MPF

INDIANA
DEPARTMENT OF TRANSPORTATION

GENERAL NOTES AND INDEX

HORIZONTAL SCALE	BRIDGE FILE NO.
N/A	050-15-002100 CEBL
VERTICAL SCALE	DESIGNATION NO.
N/A	2200671
	SHEETS
	2 of 11
	CONTRACT NO.
	B-44450

S:\COL\4000---4099\4060\737\Drawings\CAD\Plan\Sht_Index.dgn 6/11/2026 11:02:00 AM gregsz

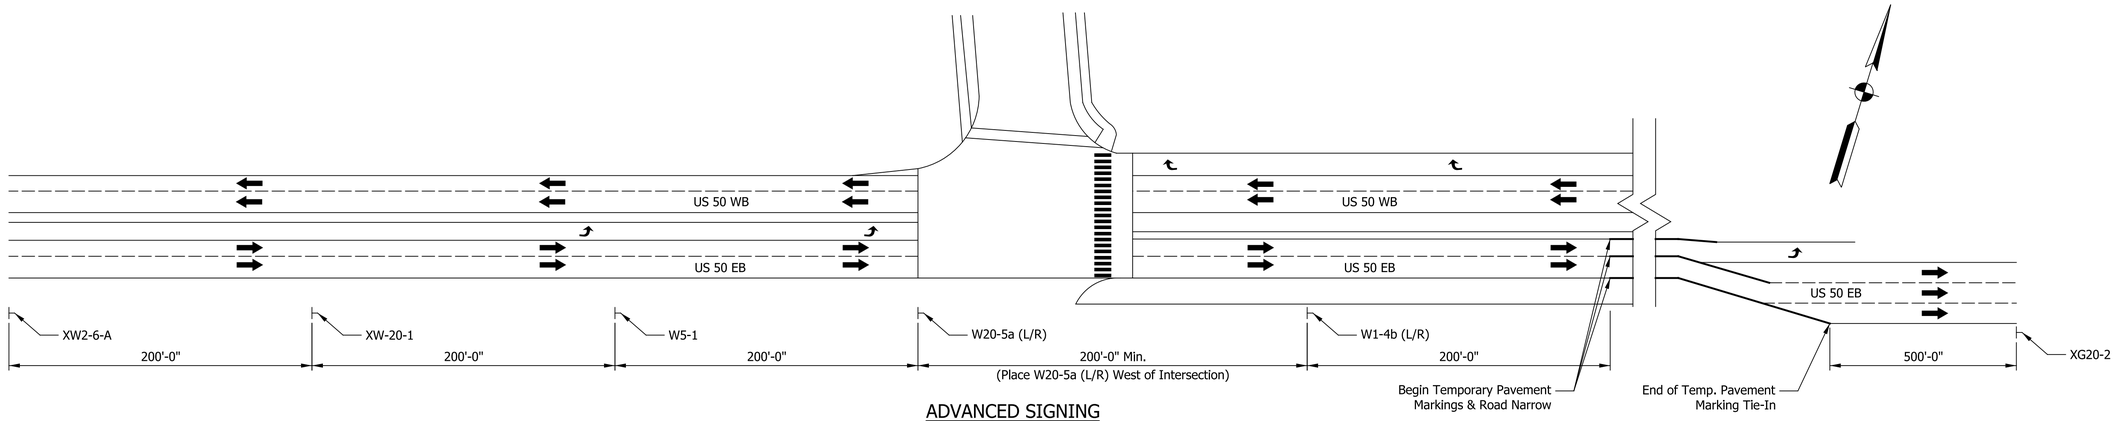

ADVANCED SIGNING
(TYP. BOTH PHASES)

NOT TO SCALE



XW-20-1 (48X48)
"Road Work Ahead"



XW2-6-A (78X42)
"Speeding Fines"




W5-1 (48X48)
"Road Narrows"




W1-4b (L/R) (48X48)
"Two Lane Shift Left/Right"



W20-5a (L/R) (48X48)
"Two Left/Right Lanes Closed"



XG20-2 (60X24)
"End Road Work"

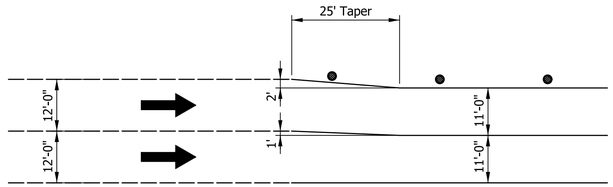

ROAD NARROWS DETAIL

NOT TO SCALE

Maintenance Of Traffic Quantities			
Pay Item	Phase 1	Phase 2	Total
Temporary Pavement Marking, Removable 6 in., Yellow	1,375 LFT	1,490 LFT	2,865 LFT
Temporary Pavement Marking, Removable 6 in., White	2,940 LFT	1,435 LFT	4,375 LFT
Temporary Pavement Marking, Removable 6 in., Black	3,500 LFT	-	3,500 LFT
Construction Sign, Type A	9 EACH	9 EACH	9 EACH
Construction Sign, Type B	2 EACH	-	2 EACH
Barricade, Type III-A	72 LFT	96 LFT	96 LFT
Temporary Pedestrian Channelizer	28 LFT	-	28 LFT
Pavement Message Marking, Remove	9 SYS	-	9 SYS
Line, Remove	2,768 LFT	-	2,768 LFT

NOTES

1. Construction Zone Speed Limit is 30 mph.

MARIAH PAIGE FEINMORE
REGISTERED
PE12500349
STATE OF INDIANA
PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL Mariah Feinmore 6/2/2026
DESIGN ENGINEER DATE


DESIGNED: EMS DRAWN: EMS
CHECKED: MPF CHECKED: MPF

INDIANA
DEPARTMENT OF TRANSPORTATION


MAINTENANCE OF TRAFFIC
ADVANCED SIGNAGE

HORIZONTAL SCALE	BRIDGE FILE NO.
N/A	050-15-002100 CEBL
VERTICAL SCALE	DESIGNATION NO.
N/A	2200671
	SHEETS
	3 of 11
	CONTRACT NO.
	B-44450

S:\COL\4000--4099\4060\737\Drawings\CAD\Plan\Sht_MOT.dgn 6/11/2026 11:02:00 AM grsgs

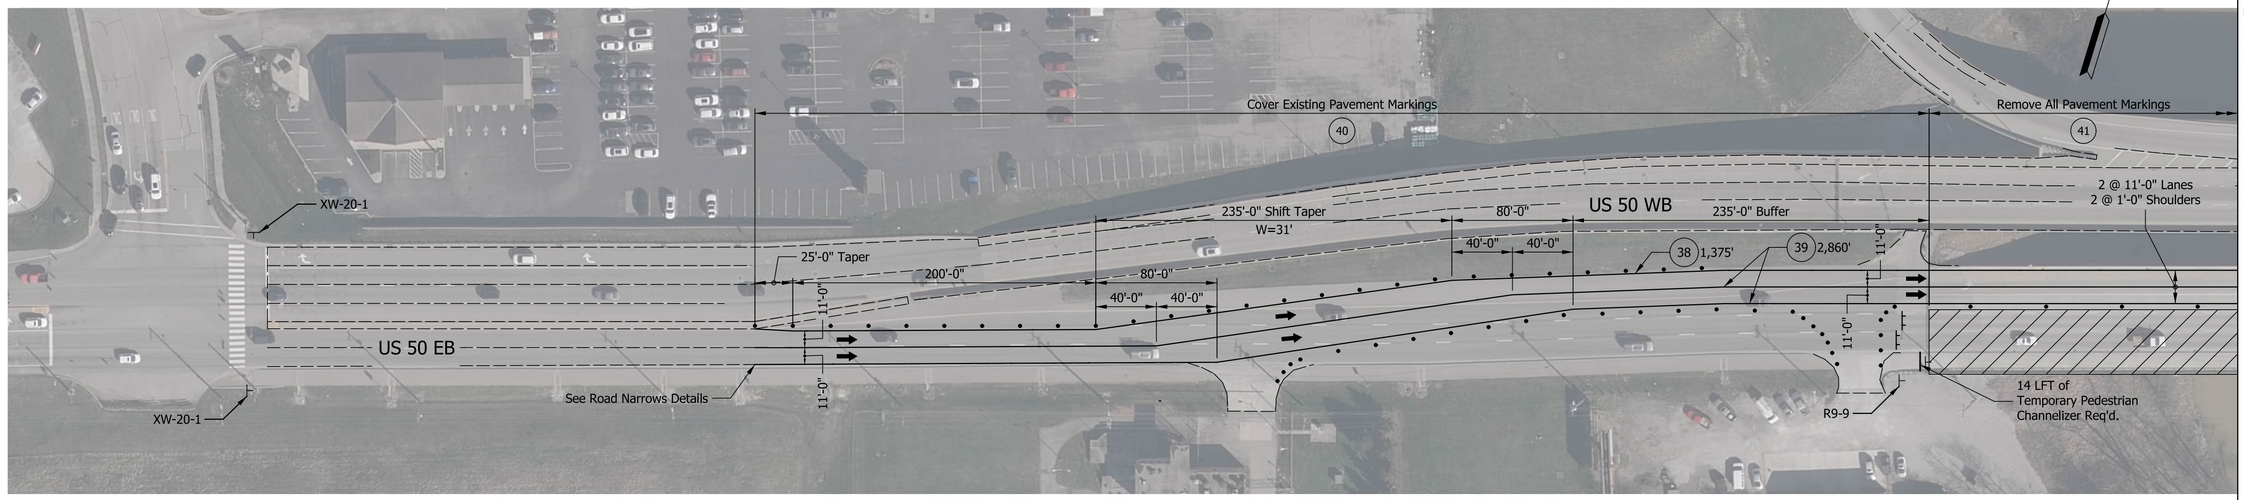

PLAN - PHASE 1

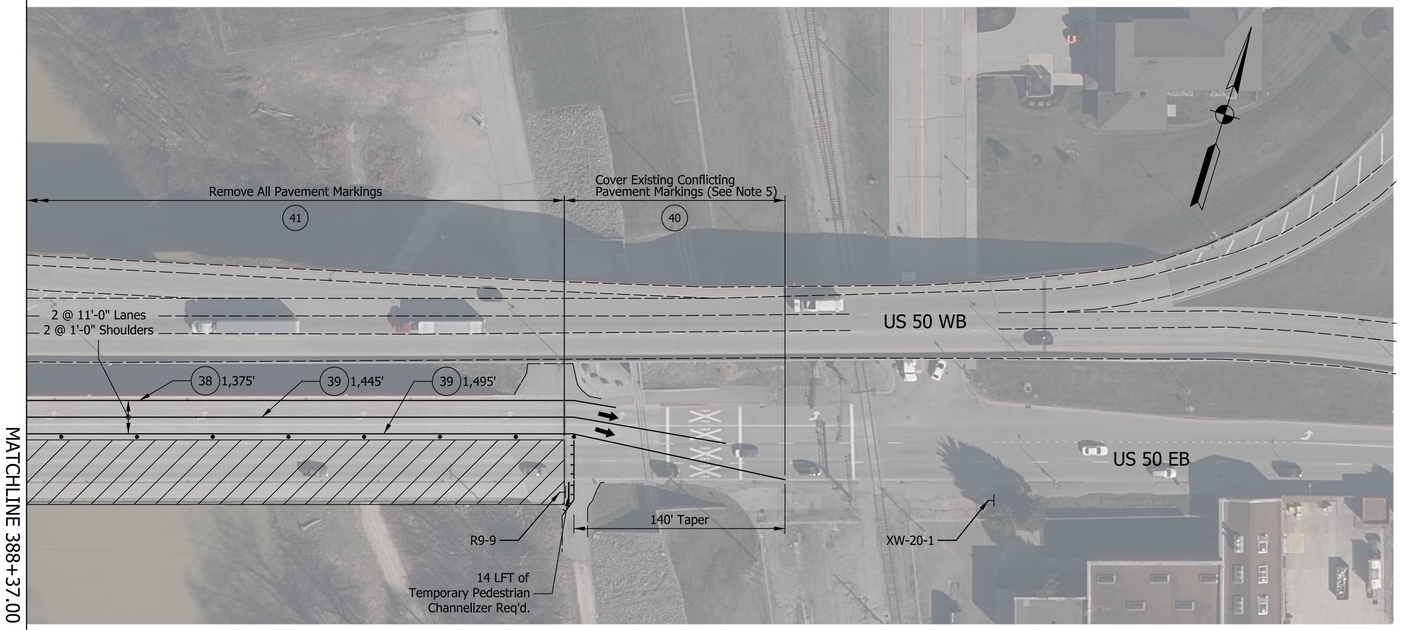

PLAN - PHASE 1

SIDEWALK CLOSED

R9-9 (24X12)
"Sidewalk Closed"

LEGEND

- (38) Temporary Pavement Marking, Removable 6 in., Yellow
- (39) Temporary Pavement Marking, Removable 6 in., White
- (40) Temporary Pavement Marking, Removable 6 in., Black
- (41) Pavement Message Marking, Remove
- Channelization Drum
- Direction of Traffic Flow Arrow
- Barricade Type III-A
- Construction Area

PHASE 1 NOTES

1. Maintain traffic in the left turn lane and northern most eastbound lane.
2. Sidewalk will be closed.
3. Construct southern two eastbound lanes thin deck overlay. Surface seal existing sidewalk and barrier rail.

NOTES

1. Construction Zone Speed Limit is 30 mph.
2. See Standard Drawing E 801-TPAR-11 for Temporary Pedestrian Channelizer.
3. See Sht. 3 for MOT Quantities and Advanced Signing.
4. Construction Clear Zone is 13'.
5. Do not cover the railroad crossing pavement markings and the left turn arrow pavement markings on asphalt pavement.

MARIAH PAIGE FENIMORE
REGISTERED
PE12500349
STATE OF INDIANA
PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL Mariah Fenimore 6/2/2026
DESIGN ENGINEER DATE


DESIGNED: EMS DRAWN: EMS
CHECKED: MPF CHECKED: MPF

INDIANA
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC
PHASE 1


HORIZONTAL SCALE	BRIDGE FILE NO.
1" = 50'	050-15-002100 CEBL
VERTICAL SCALE	DESIGNATION NO.
N/A	2200671
	SHEETS
	4 of 11
	CONTRACT NO.
	B-44450

S:\COL\14000-14099\14060\37\Drawings\CAD\Plan\Sht_MOT.dgn 6/11/2026 11:02:01 AM

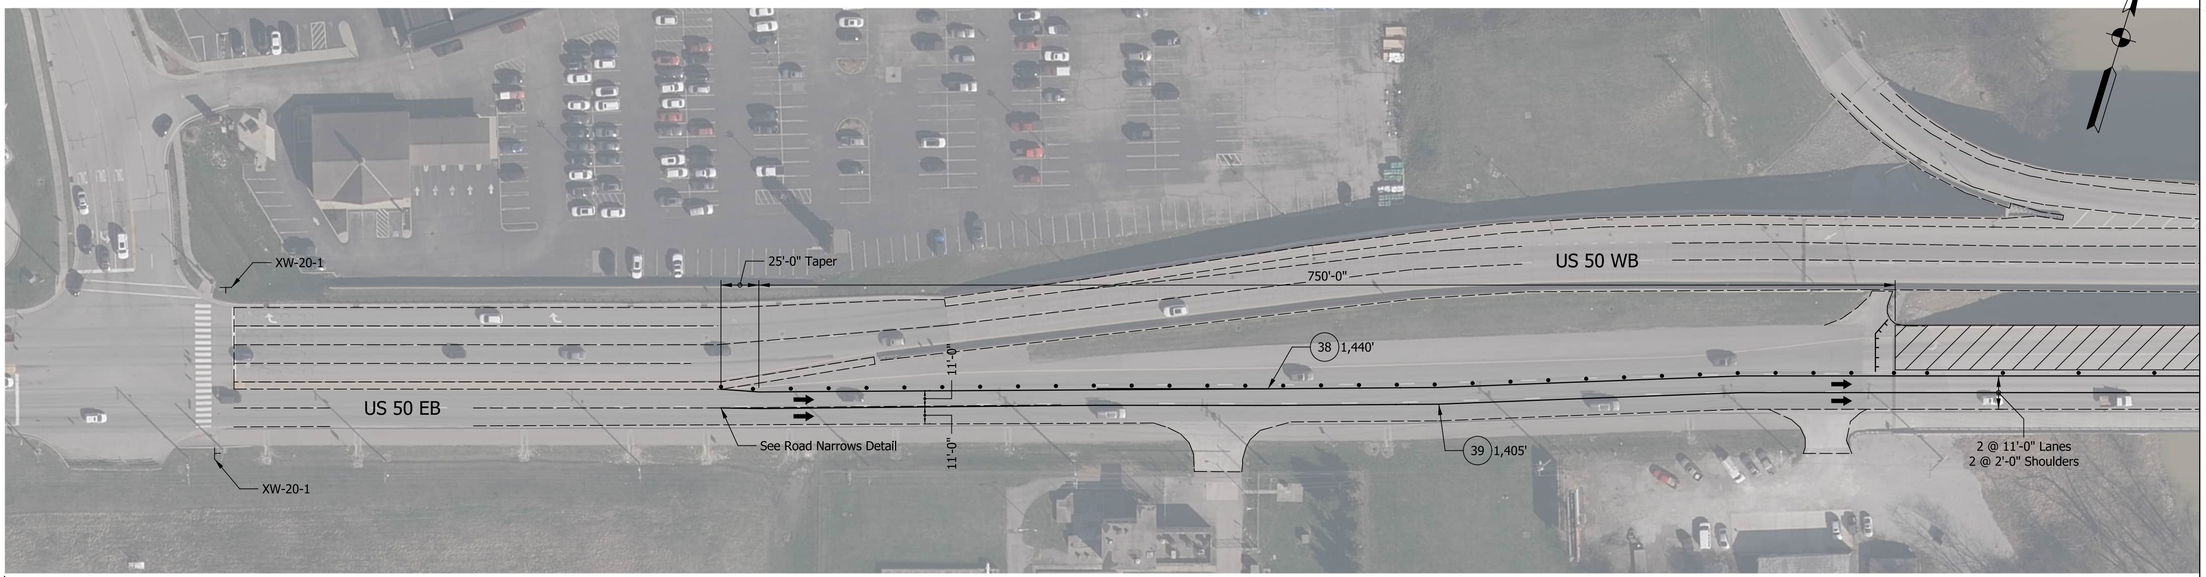

MATCHLINE 388+37.00 "A"

PLAN - PHASE 2

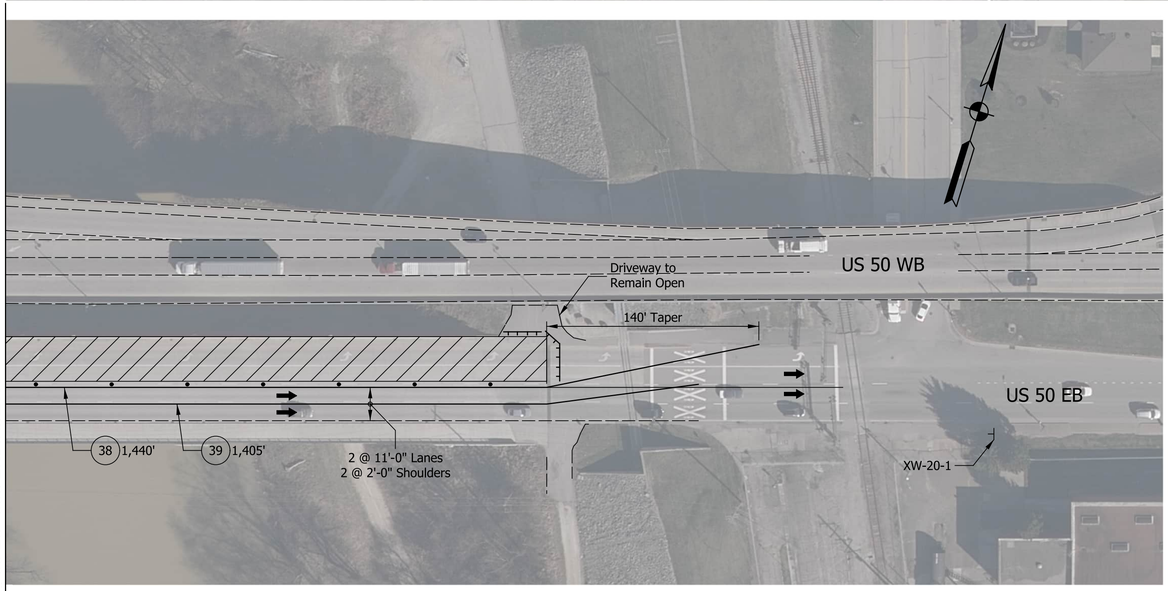

MATCHLINE 388+37.00 "A"

PLAN - PHASE 2

LEGEND

- (38) Temporary Pavement Marking, Removable 6 in., Yellow
- (39) Temporary Pavement Marking, Removable 6 in., White
- Channelization Drum
- Direction of Traffic Flow Arrow
- Barricade Type III-A
- Construction Area

PHASE 2 NOTES

1. Maintain traffic in the southern most eastbound lanes.
2. Construct northern most eastbound lane and turn lane thin deck overlay. Surface seal existing barrier rail.

NOTES

1. Construction Zone Speed Limit is 30 mph.
2. See Sht. 3 for MOT Quantities and Advanced Signing.
3. Construction Clear Zone is 13'.

MARIAH PAIGE FENIMORE * REGISTERED * PE12500349 STATE OF INDIANA PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL Mariah Fenimore 6/2/2026
DESIGN ENGINEER DATE


DESIGNED: EMS DRAWN: EMS
CHECKED: MPF CHECKED: MPF

INDIANA
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC
PHASE 2


HORIZONTAL SCALE	BRIDGE FILE NO.
1" = 50'	050-15-002100 CEBL
VERTICAL SCALE	DESIGNATION NO.
N/A	2200671
	SHEETS
	5 of 11
	CONTRACT NO.
	B-44450

S:\COL\4000—4099\4060\737\Drawings\CAD\Plan\Sht_MOT.dgn 6/11/2026 11:02:15 AM gregs

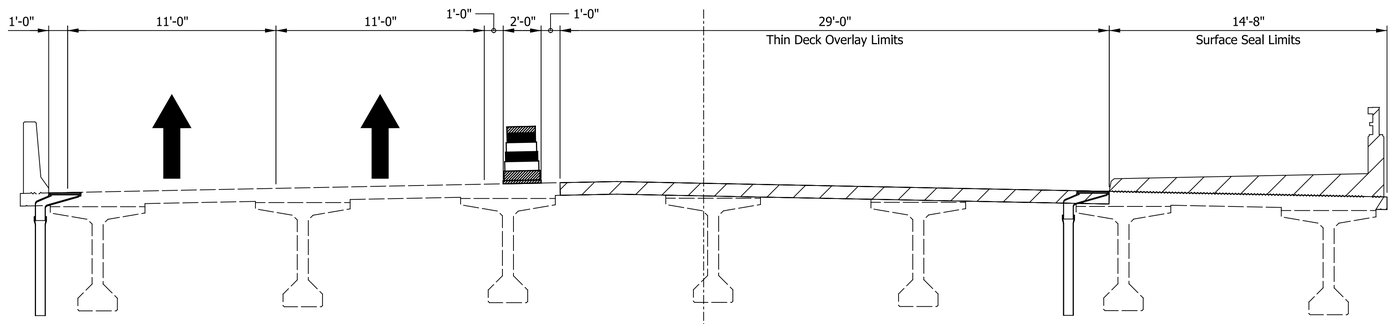

PHASE 1

Pedestrian Traffic to be temporarily closed while surface seal is applied to sidewalk and coping.

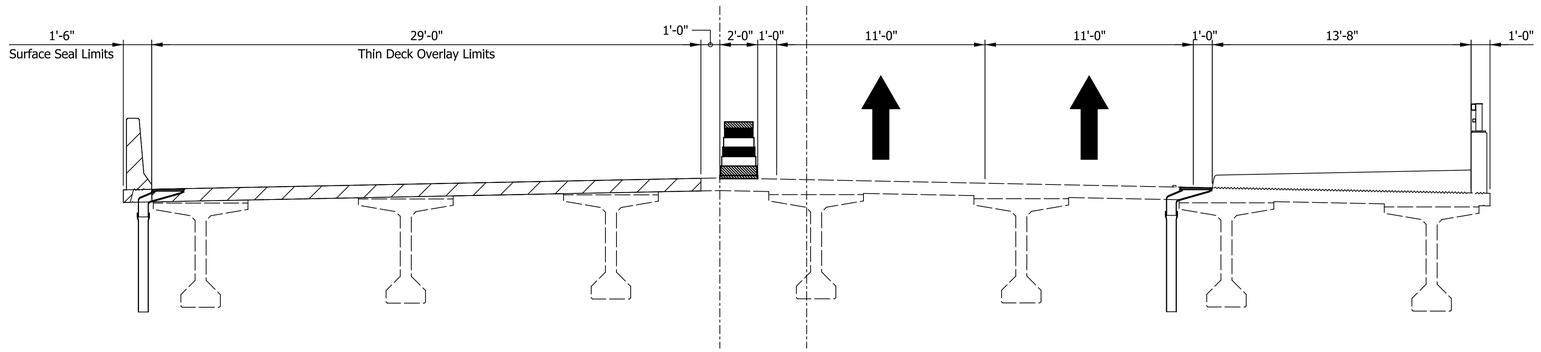

PHASE 2

Pedestrian Traffic to be opened while surface seal and thin deck overlay applied to barrier, north lane, and shoulder.

NOTES

1. The Construction Zone Speed Limit is 30 mph.

MARIAH PAIGE FENIMORE
REGISTERED
PE12500349
STATE OF INDIANA
PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL Mariah Fenimore 6/2/2026
DESIGN ENGINEER DATE


DESIGNED: EMS DRAWN: EMS
CHECKED: MPF CHECKED: MPF

INDIANA
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC
TYPICAL SECTIONS

HORIZONTAL SCALE	BRIDGE FILE NO.
1/4" = 1'-0"	050-15-002100 CEBL
VERTICAL SCALE	DESIGNATION NO.
1/4" = 1'-0"	2200671
	SHEETS
	6 of 11
	CONTRACT NO.
	B-44450

S:\COL\4000--4099\4060\737\Drawings\CAD\Plan\Sht_MOT.dgn 6/11/2026 11:02:26 AM gregsz

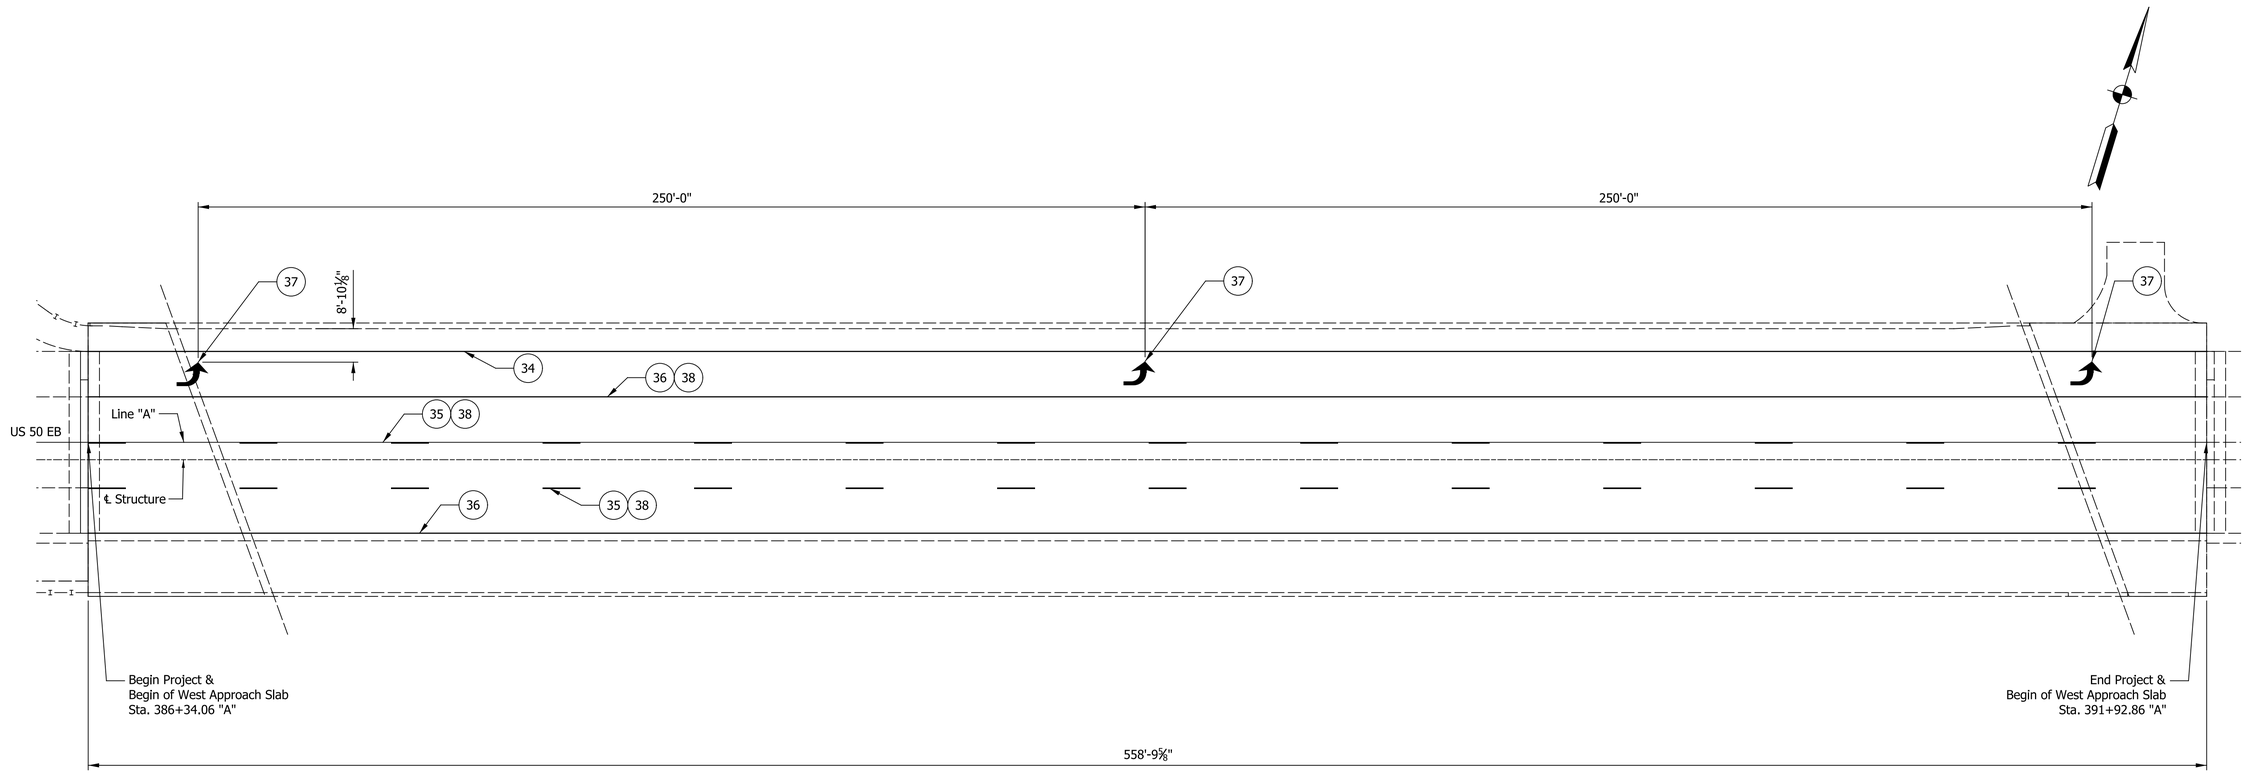

PLAN

LEGEND

34	Line, Preformed Plastic Solid Yellow, 6 in.
35	Line, Preformed Plastic Broken White, 6 in.
36	Line, Preformed Plastic Solid White, 6 in.
37	Pavement Message Marking, Multi-Component, Lane Indication Arrow
38	6 Prismatic Reflectors (White / Red)

NOTES

1. Prismatic Reflectors of Raised Snowplowable Pavement Markers (RSPM) to be replaced within project limits.
2. All pavement markings on bridge deck and approach slabs to be removed and replaced.

MARIAH PAIGE FENIMORE
REGISTERED
PE12500349
STATE OF INDIANA
PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL Mariah Fenimore 6/2/2026
DESIGN ENGINEER DATE

DESIGNED: EMS DRAWN: EMS
CHECKED: MPF CHECKED: MPF


INDIANA
DEPARTMENT OF TRANSPORTATION

PAVEMENT MARKINGS DETAIL
US 50 OVER TANNERS CREEK


HORIZONTAL SCALE	BRIDGE FILE NO.
1" = 20'	050-15-002100 CEBL
VERTICAL SCALE	DESIGNATION NO.
N/A	2200671
	SHEETS
	7 of 11
	CONTRACT NO.
	B-44450

6/11/2026 11:02:27 AM gregsz
S:\COL\4000—4099\4060\737\Drawings\CAD\Plan\Sht_Pavement_Markings.dgn

STRUCTURE BUILT ON A 430' VERTICAL CURVE

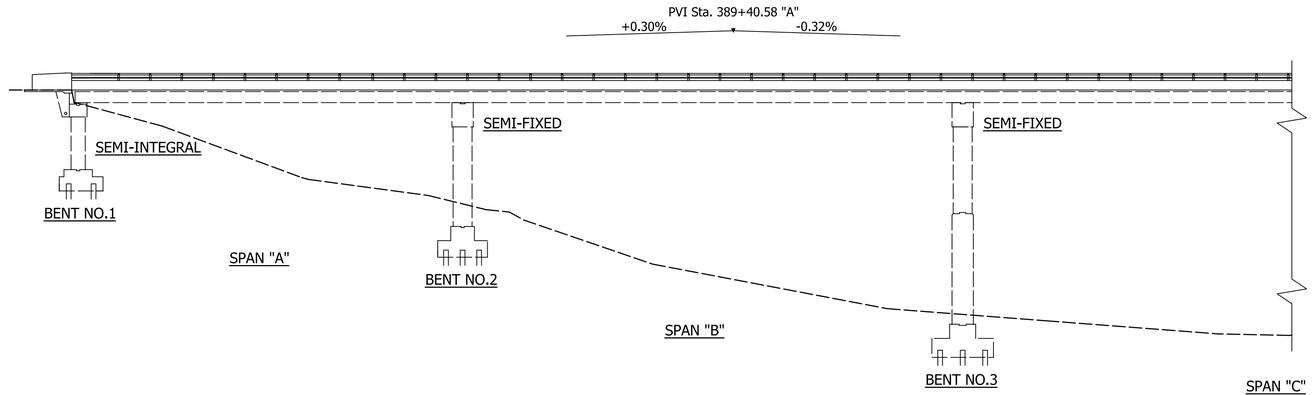

HALF ELEVATION VIEW

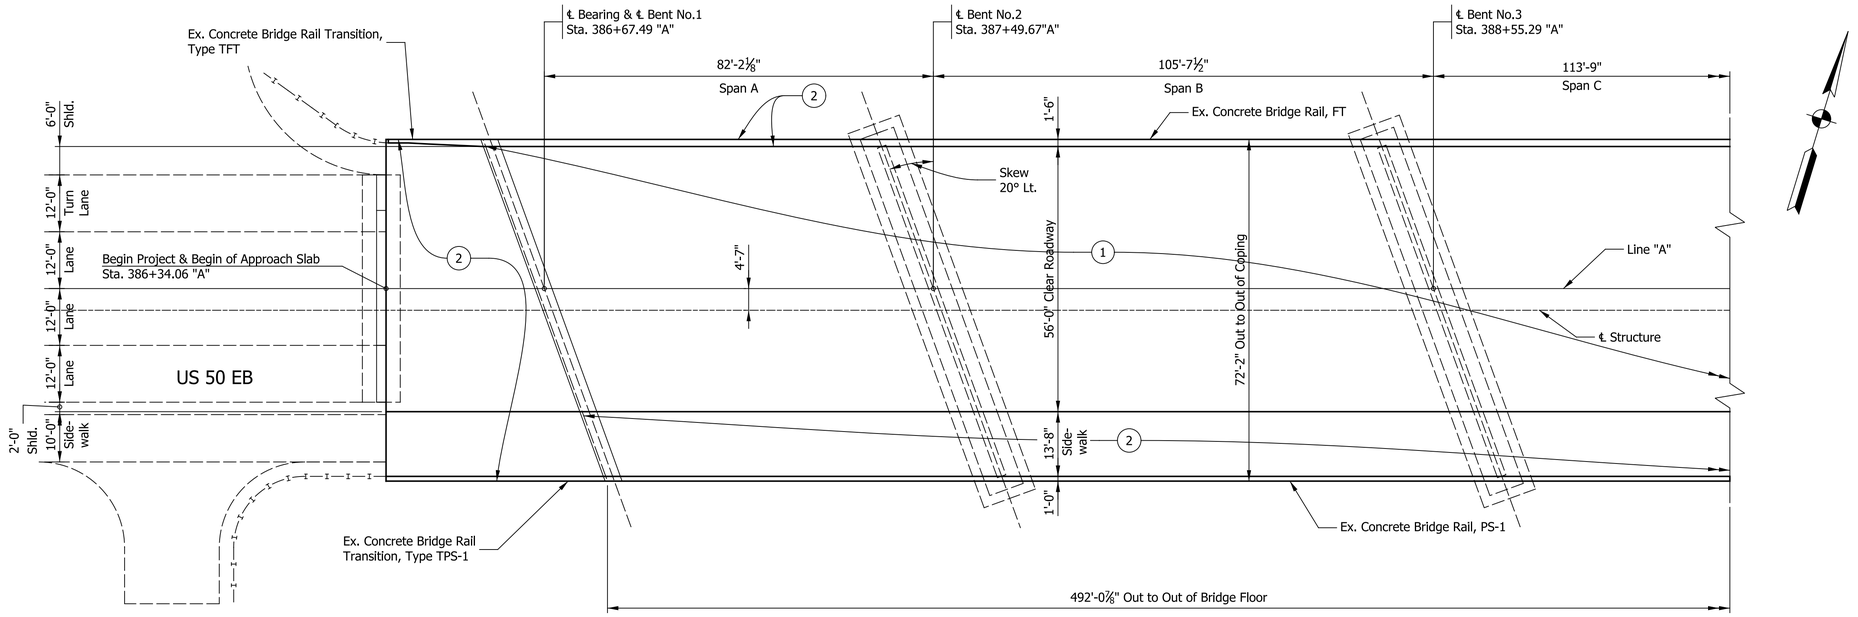

HALF PLAN VIEW

LEGEND

1. Thin Deck Overlay
2. Surface Seal

CONTINUOUS COMPOSITE PRESTRESSED
CONCRETE BULB-T BEAM BRIDGE
5 SPANS: 82'-2⅛", 105'-7½",
113'-9", 105'-7½", 81'-11¾"
56'-0" CLEAR ROADWAY; 20° SKEW LT.
US 50 OVER TANNERS CREEK
DEARBORN COUNTY

MARK PAIGE FENIMORE
REGISTERED
PE12500349
STATE OF INDIANA
PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL Mark Fenimore 6/2/2026
DESIGN ENGINEER DATE

DESIGNED: EMS DRAWN: EMS
CHECKED: MPF CHECKED: MPF


INDIANA
DEPARTMENT OF TRANSPORTATION

GENERAL PLAN
PROPOSED

HORIZONTAL SCALE	BRIDGE FILE NO.
1/16" = 1'-0"	050-15-002100 CEBL
VERTICAL SCALE	DESIGNATION NO.
1/16" = 1'-0"	2200671
	SHEETS
	8 of 11
	CONTRACT NO.
	B-44450

S:\COL\4000—4099\4060\737\Drawings\CAD\Plan\Sht_General_Plan_Proposed.dgn 6/11/2026 11:02:27 AM gregs


STRUCTURE BUILT ON A 430' VERTICAL CURVE

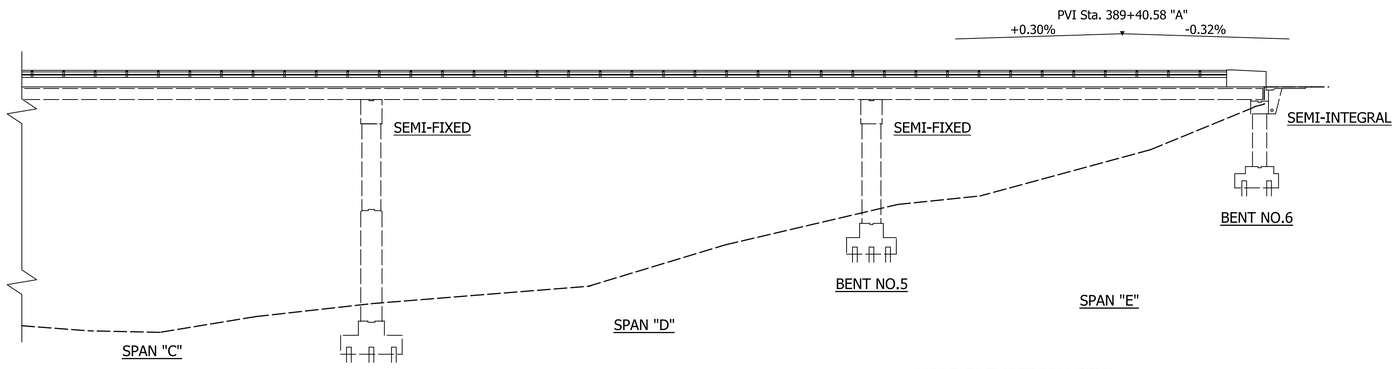

HALF ELEVATION VIEW

LEGEND

1. Thin Deck Overlay
2. Surface Seal

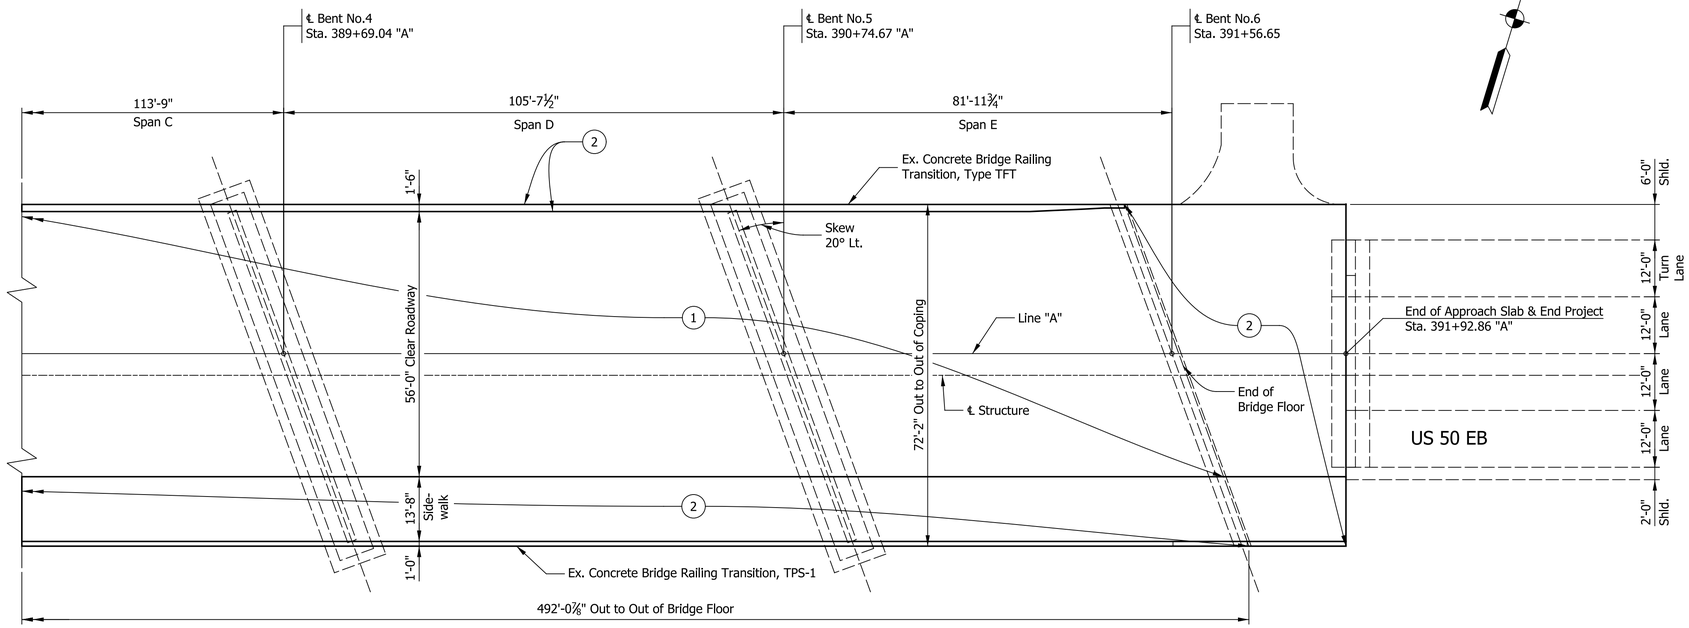

HALF PLAN VIEW

CONTINUOUS COMPOSITE PRESTRESSED
CONCRETE BULB-T BEAM BRIDGE
5 SPANS: 82'-2⅛", 105'-7½",
113'-9", 105'-7½", 81'-11¾"
56'-0" CLEAR ROADWAY; 20° SKEW LT.
US 50 OVER TANNERS CREEK
DEARBORN COUNTY

MARIAH PAIGE FENIMORE
REGISTERED
PE12500349
STATE OF
INDIANA
PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL Mariah Fenimore 6/2/2026
DESIGN ENGINEER DATE

DESIGNED: EMS DRAWN: EMS
CHECKED: MPF CHECKED: MPF


INDIANA
DEPARTMENT OF TRANSPORTATION

GENERAL PLAN
PROPOSED

HORIZONTAL SCALE	BRIDGE FILE NO.
1/16" = 1'-0"	050-15-002100 CEBL
VERTICAL SCALE	DESIGNATION NO.
1/16" = 1'-0"	2200671

	SHEETS
	9 of 11
	CONTRACT NO.
	B-44450

S:\COL\4000--4099\4060\737\Drawings\CAD\Plan\Sht_General_Plan_Proposed.dgn 6/11/2026 11:02:27 AM

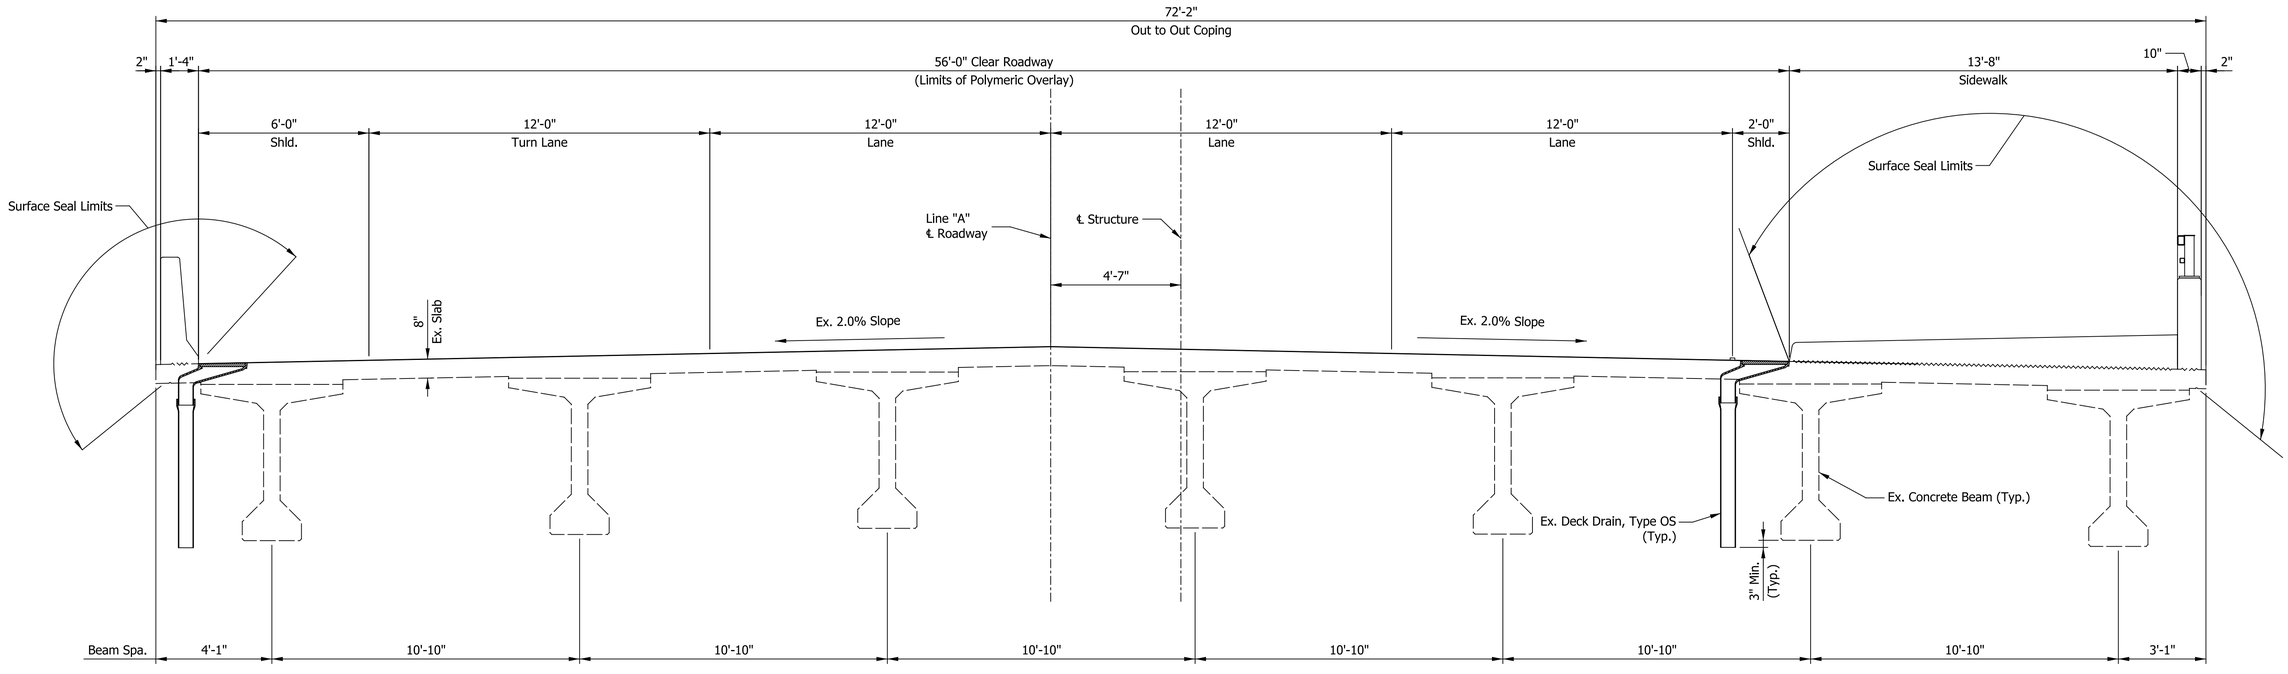

PROPOSED BRIDGE TYPICAL SECTION

DESIGN DATA

Live Load:

HS20-44 loading with distribution in accordance with 2002 A.A.S.H.T.O. Standard Specifications 17th Edition with All Subsequent Interims.

Design Stresses:

Class "C" Concrete f'c = 4,000 psi
Class "A" Concrete f'c = 3,500 psi
Class "B" Concrete f'c = 3,000 psi
Reinforcing Steel fy = 60,000 psi

GENERAL NOTES

1. The contractor shall check all dimensions and conditions in the field, report any errors or discrepancies to the Engineer, and assume responsibility for the correctness and fit of new parts to the old.
2. Existing Plans are on File with the Central Office of the Indiana Department of Transportation Under Bridge file 050-15-0021CEBL.
3. Clean and Surface Seal faces of barrier railing and deck coping to drip bead as shown. Surface Seal reinforced concrete approach slab, sidewalk, and bridge railing transitions. (Estimated quantity = 20,484 SFT)
4. No additional longitudinal or transverse construction joints shall be placed in the overlay outside of those shown on the plans.

CONTINUOUS COMPOSITE PRESTRESSED
CONCRETE BULB-T BEAM BRIDGE
5 SPANS: 82'-2$\frac{1}{8}$", 105'-7$\frac{1}{2}$",
113'-9", 105'-7$\frac{1}{2}$", 81'-11$\frac{3}{4}$"
56'-0" CLEAR ROADWAY; 20° SKEW LT.
US 50 OVER TANNERS CREEK
DEARBORN COUNTY

MARIAH PAIGE FENIMORE
REGISTERED
PE12500349
STATE OF
INDIANA
PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL Mariah Fenimore 6/2/2026
DESIGN ENGINEER DATE

DESIGNED: EMS DRAWN: EMS
CHECKED: MPF CHECKED: MPF

INDIANA
DEPARTMENT OF TRANSPORTATION

GENERAL PLAN
TYPICAL SECTIONS

HORIZONTAL SCALE	BRIDGE FILE NO.
3/8" = 1'-0"	050-15-002100 CEBL
VERTICAL SCALE	DESIGNATION NO.
3/8" = 1'-0"	2200671
	SHEETS
	10 of 11
	CONTRACT NO.
	B-44450

S:\CQL\4000—4099\4060\7371\Drawings\CAD\Plan\Sht_General_Plan_Proposed.dgn 6/11/2026 11:02:28 AM gregsz

SUMMARY OF BRIDGE QUANTITIES

ITEM	CONCRETE				CONCRETE RAILING CLASS C	REINF. BARS	REINF. BARS, EPOXY COATED	RAILING STEEL	BARRIER DELIN-EATORS	WARRANTED POLYMERIC OVERLAY	DENSE GRADED SUBBASE	STRUCT. STEEL	ANCHOR PLATES MK-AP	PILES										GRATES BASINS, & FITTINGS, CAST IRON	EXP. JOINT TYPE __	CONC. STR. MEMBERS		SURFACE SEAL**
	CLASS C	CLASS A	CLASS B											STEEL PIPE (SIZE)	STEEL PIPE EPOXY COATED (SIZE)	STEEL H (SIZE)	STEEL H EPOXY COATED	STEEL H REINF. CONC. ENCASED	TEST PILE, DYNAMIC, PRODUCTION	TEST PILE, DYNAMIC, RESTRIKE	PILE SHOE (SIZE)	PILE TIP STEEL H (SIZE)	CORED HOLE IN ROCK				BOX BEAM TYPE & SIZE	I BEAM TYPE & SIZE	
	SUPERSTR	SUBSTR	ABOVE FTG.	IN FTG.																		NO.	LFT				
	CYS	CYS	CYS	CYS	CYS	LBS	LBS	LFT	EACH	SYS	CYS	LBS	EACH	LFT	LFT	LFT	LFT	LFT	LFT	EACH	EACH	EACH			LBS	LFT	LFT	LFT	SFT
E RCBA																													1,719
W RCBA																													1,719
SIDEWALK																													7,933
SUPERSTRUCTURE										3,062																			
CONCRETE RAILING PS-1																													3,991
CONCRETE RAILING TYPE FT																													5,122
TOTALS										3,062																			20,484

** Estimated Quantity

PAVEMENT MARKINGS TABLE

LOCATION		LINE, PREFORMED PLASTIC				PAVEMENT MESSAGE MARKING, MULTI-COMPONENT		PRISMATIC REFLECTORS	
		BROKEN WHITE 6 IN.	BROKEN YELLOW 6 IN.	SOLID YELLOW 6 IN.	SOLID WHITE 6 IN.	LANE INDICATION ARROW (LT.)	RR CROSSING	YELLOW / RED	WHITE / RED
LT./RT.	STATION	FT	FT	FT	FT	EACH	EACH	EACH	EACH
LT.	386+34.06 "A" to 391+92.86 "A"			559	559	3			6
Mid.	386+34.06 "A" to 391+92.86 "A"	140							6
Rt.	386+34.06 "A" to 391+92.86 "A"	140			559				6
TOTALS		280		559	1,118	3			18

MARIAH PAIGE FENIMORE REGISTERED PE12500349 STATE OF INDIANA PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL Mariah Fenimore 6/2/2026
DESIGN ENGINEER DATE

DESIGNED: EMS DRAWN: EMS
CHECKED: MPF CHECKED: MPF

INDIANA DEPARTMENT OF TRANSPORTATION

BRIDGE SUMMARY
US 50 OVER TANNERS CREEK

HORIZONTAL SCALE	BRIDGE FILE NO.
N/A	050-15-002100 CEBL
VERTICAL SCALE	DESIGNATION NO.
N/A	2200671
	SHEETS
	11 of 11
	CONTRACT NO.
	B-44450

gregsz
11:02:28 AM
6/11/2026
S:\COL\4000—4099\4060\737\Drawings\CAD\Plan\Sht_Bridge_Summary.dgn